


COIL TUBING PRODUCTS

Internal Dimple Connector - 280 Series

The Coil Solutions Internal Dimple Connector was designed to attach the BHA to the end of the coil.

The connector is secured to the inside of the coil tubing by a series of set screws that seat a pattern of impressions created with a special design dimpling tool.

- Fast & easy to redress
- High torque, high tensile applications
- Used for drilling, milling, and fracturing
- Slimline applicators & Split Applicators

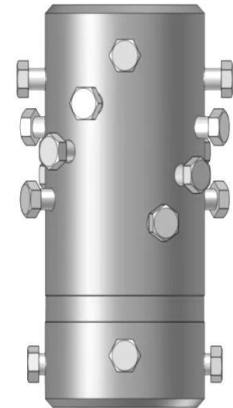

*Note. All values are rated for STD material.

Coil Size (in)	1.75	2	2.375	2.625	2.875
Tool OD (in)	1.75	2	2.375	2.875	2.875
Connections	1" MT	1-1/2" MT	1-1/2"	2-3/8"	2-3/8"
Tensile Yield (lbs)	71,000	90,000	MT	PAC	PAC
Torsional Strength (ft/lbs)	690	1600	106,000	130,000	139,300
ID (in)	.765	1.000	1.062	1.375	1.375
Length (in)	8	11.00	11.1	14.3	11.5
Working Pressure (psi)	10,000	10,0000	10,000	10,000	10,000

*Other sizes and thread variations upon request.

For Further Information Please Contact:

Salesusa@coilsolutions.com – USA Sales@coilsolutions.com – Canada www.coilsolutions.com