


# COIL TUBING PRODUCTS

## Hydraulic Release Overshot - 5010 Series

The Coil Solutions Hydraulic Release Overshot was designed to retrieve lost or broken tools and tubing from the wellbore.

The latching mechanism is a robust/slip design which releases positively from the stuck fish when a hydraulic differential is applied to the tool. The tool does not require shear pins or drop balls since the differential required to activate the tool is provided by circulating through a choke insert in the core.

- Flow release
- Multiple engagement and disengagement of fish
- Wide catch range
- Extended versions available
- N<sub>2</sub>/Fluid compatible
- Can be used with Coil Solutions Mechanical Drive Tool and Jar

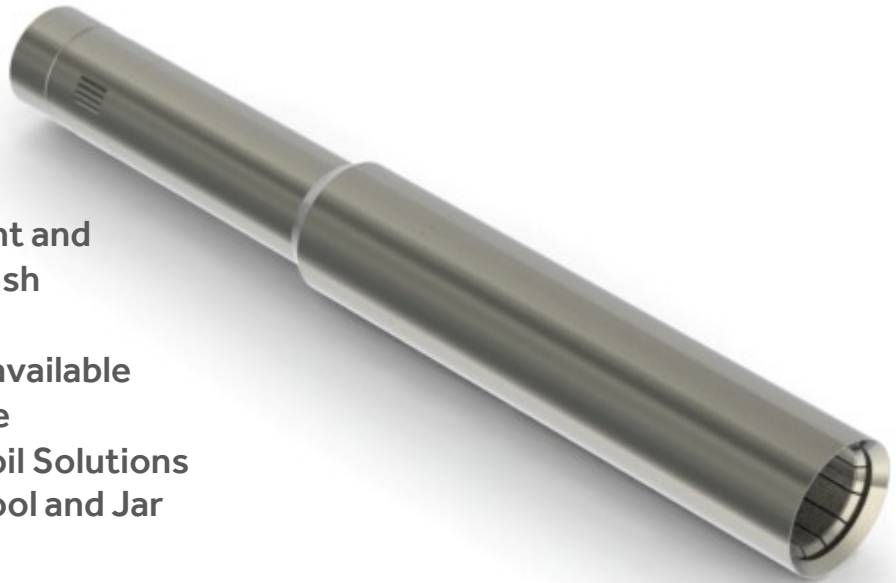

\*Note. All values are rated for STD material.

Tool OD (in)	1.850	2.250	3.250	3.500	3.625
Connections	1" AMMT	1 1/2" AMMT	2 3/8" PAC	2 3/8" PAC	2 3/8" PAC
Tensile Strength (lbs)	37,000	52,000	131,000	114,000	118,000
Maximum Catch Size (in)	1.562	1.687	2.093	2.625	2.875
Minimum Catch Size (in)	.500	.562	.593	.500	1.000
Length (in)	23.16	23.38	27.19	27.30	27.21

\*Other sizes and thread variations upon request.

**For Further Information Please Contact:**

Salesusa@coilsolutions.com – USA Sales@coilsolutions.com – Canada [www.coilsolutions.com](http://www.coilsolutions.com)